


PCD3.W745

Universal temperature measurement module for up to 4 measuring inputs, 16 bits, TC Type J & K and 4-wire Pt/Ni 100/1000



Main characteristics

- ▶ Four input channels, each with 4 spring terminals, all inputs software configurable
- ▶ Electrical isolation between input channels and PCD ground (the channels themselves are not separated against each other)
- ▶ Integrated cold junction for thermocouple
- ▶ External cold junction compensation can be measured via channel 0
- ▶ RTD measurement with 2, 3, or 4-wire connection
- ▶ The linearization and all compensation activities as well as the conversion into °C, °F and K is done in the module (Thermocouples types R, S, T, E, N on request)



PCD3.W745


Powerful sensor diagnostics

- ▶ Overshoot and undershoot detection in measurement range
- ▶ Line breaks detection
- ▶ Short-circuit detection for resistance thermometers (RTD)
- ▶ 3 LEDs to indicate configuration, data acquisition, connection states, line breaks or short circuits

Hardware configuration

- ▶ PCD3.W745 modules are for use with the entire PCD3 family. This includes CPUs, PCD3.Txxx and PCD3.Cxxx.
- ▶ The functions of the module are defined by the firmware or by the programming environment for the respective CPU.

Indicators and connections

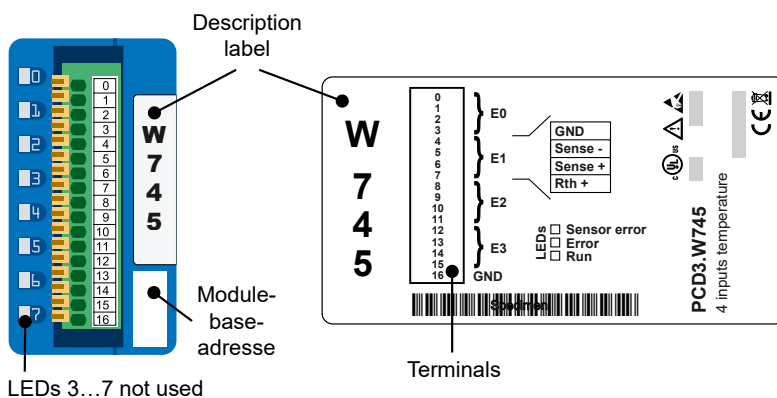

LED	Meaning	Description
0	Run	The Run LED blinks when the data acquisition is running
1	Error	The Error LED indicates that the module has no valid configuration.
2	Sensor Error	Indicates that at least one of the inputs detects: <ul style="list-style-type: none"> • no connection • line break • short circuit

Technical Data

All specifications at 25 °C ambient temperature, unless otherwise noted.

Sensor types	TC Type J	TC Type K	Pt100 Pt1000	Ni100 Ni1000
Input range for temperature sensors	-210 ... 1200 °C ¹⁾ DIN IEC 584	-270 ... 1372 °C ¹⁾ DIN IEC 584	-200 ... 850 °C DIN IEC 751	-60 ... 250 °C DIN IEC 43760
Measurement range	-75 mV ... +75 mV		Pt/Ni100: 0 ... 600 Ω Pt/Ni1000: 0 ... 5000 Ω	
Resolution	0.1 °C		0,1 °C	
	2.5 μV		0.01 Ω (Range 600 Ω) 0.10 Ω (Range 5000 Ω)	
Measuring error in % of full scale value ²⁾	0.05 %		0.05 %	
Measuring error in °C	Alternative to the "measuring error in %" specification above:			
	-100 ... +100 °C: <0.4 °C -150 ... +500 °C: <0.7 °C -150 ... +1000 °C: <1.0 °C		-100 ... +100 °C: <0.3 °C -150 ... +500 °C: <0.4 °C -200 ... +850 °C: <0.5 °C	
Temperature coefficient of full scale value ²⁾	10 ppm/K		80 ppm/K	
Sampling time per channel	250 ms			
Measurement resolution	16 Bit			
50 Hz rejection	>75 dB			
60 Hz rejection	>60 dB			
Line break detection	✓	✓	✓	✓
Short circuit detection	✗	✗	✓	✓
Linearization	on Board			
Compensation of cold junction temperature	on Board		N/A	
Cold junction internal	yes ³⁾		N/A	
Cold junction external	yes		N/A	
Connection techniques for resistors (RTD's)	N/A		2-wire 3-wire 4-wire	
Galvanic isolation	500VDC between CPU and analogue inputs			
Ambient temperature	Operation: 0 ... +50 °C without forced ventilation Storage: -25 ... +85 °C			
Power supply	No external power supply necessary			
Internal power consumption from +5V bus	200 mA			
Wire gauge	max. 0.5 mm ² (AWG 20)			
Wire Stripping	Remove 10 mm of isolation			
Internal reference junction (internal cold junction)				
The built-in Reference Junction is used when thermocouples are directly connected to the module				
	Built-in Temperature sensor			
Operating temperature range	0 ... 55 °C			
Resolution	0.1 °C			
Measuring error at 25 °C	0.8 °C			
Drift over operating Temperature Range (0 ... 55 °C)	0.05 °C/°C			
Stabilization time	5 min.			


¹⁾ For thermocouples, the full measurement range is offered. The specifications of resolution and accuracy are given for temperatures higher than -150 °C. For lower temperatures than -150 °C, the characteristics of thermocouples become worse. If thermocouples are used in this very low temperature range, the tolerance should be calculated using the tolerance specifications for the ±75 mV range and the thermocouple characteristic.

²⁾ Measuring error in % and temperature coefficient specifications made for the measurement ranges ±75 mV, 600 Ω, 5000 Ω.

³⁾ Technical data of the internal cold junction are specified in the following section.

	<p>I/O modules and I/O terminal blocks may only be plugged in and removed when the Control Edge PCD and the external + 24 V are disconnected from the power supply.</p>																		
	<p>Watchdog This module can interact with the watchdog, if it is used on base address 240. For details, please refer to the manual "27-600_I/O-modules for PCD1 / PCD2 series and for PCD3" in chapter "A4 Hardware Watchdog", which describes the correct use of the watchdog together with PCD components. This does not apply when used in PCD3.M6893.</p>																		
	<p>It is strongly recommended to check the total power consumption of all modules in a system structure with CPU and in all PCD3.C100- or PCD3.T76x-expansions to ensure that the maximum allowable power consumption is not exceeded.</p> <p>The module racks like CPU, expansion housing and RIOs provide the following internal power</p> <table border="1" data-bbox="1118 577 1482 779"> <thead> <tr> <th>Module rack</th> <th>+ 5 V</th> <th>V +</th> </tr> </thead> <tbody> <tr> <td>CPU</td> <td>600 mA</td> <td>100 mA</td> </tr> <tr> <td>PCD3.C200</td> <td>1000 mA</td> <td>100 mA</td> </tr> <tr> <td>PCD3.T66x</td> <td>600 mA</td> <td>100 mA</td> </tr> <tr> <td>PCD3.T668</td> <td>650 mA</td> <td>100 mA</td> </tr> <tr> <td>PCD3.T76x</td> <td>600 mA</td> <td>100 mA</td> </tr> </tbody> </table> <p>When using expansion units, it is recommended to place the PCD3.W745 modules in the base unit (CPU). This prevents undesirable effects such as a possible voltage drop across the connection cable from the expansion unit to the base unit.</p>	Module rack	+ 5 V	V +	CPU	600 mA	100 mA	PCD3.C200	1000 mA	100 mA	PCD3.T66x	600 mA	100 mA	PCD3.T668	650 mA	100 mA	PCD3.T76x	600 mA	100 mA
Module rack	+ 5 V	V +																	
CPU	600 mA	100 mA																	
PCD3.C200	1000 mA	100 mA																	
PCD3.T66x	600 mA	100 mA																	
PCD3.T668	650 mA	100 mA																	
PCD3.T76x	600 mA	100 mA																	
	<p>This module includes components that are sensitive to electrostatic discharges.</p>																		

Block diagram

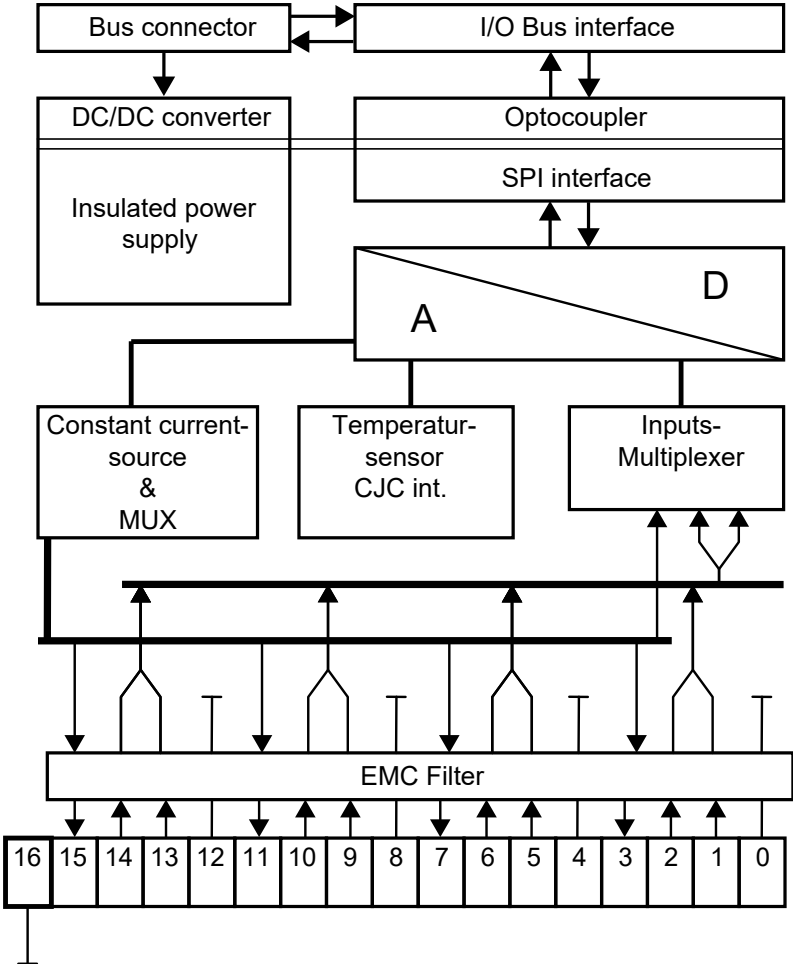

Module configuration

Sensor types / input ranges

The module has four input channels, which are individually configurable:

Thermocouples (TC)

Type J / K according to IEC584

Resistive Temperature detectors (RTD)

Pt100 / Pt 1000 according to IEC751

Ni100 / Ni1000 according to DIN 43760

Sensor types / input ranges				
All specifications at 25 °C ambient temperature, unless otherwise noted.				
	Sensortyp	Range	Output value	Units
TC	Typ K (NiCr-Ni)	-270 ... +1372 °C	-2700 ... +13720	1/10 °C 1/10 °F 1/10 K
		-454 ... +2501 °F +3 ... +1645 K	-4540 ... +25010 +30 ... +16450	
RTD	Pt100	-210 ... +1200 °C	-2100 ... +12000	1/10 °C 1/10 °F 1/10 K
		-346 ... +2192 °F +63 ... +1473 K	-3460 ... +21920 +630 ... +14730	
	Pt1000	-200 ... +850 °C	-2000 ... +8500	
		-328 ... +1562 °F +73 ... +1123 K	-3280 ... +15620 +730 ... +11230	
Ni100	-60 ... +250 °C	-600 ... +2500		
	-76 ... +482 °F +213 ... +523 K	-760 ... +4820 +2130 ... +5230		
Ni1000	-60 ... +250 °C	-600 ... +2500		
	-76 ... +482 °F +213 ... +523 K	-760 ... +4820 +2130 ... +5230		
mV	±75 mV	-75 ... +75 mV	-30000 ... +30000	2.5 µV*
Ohm	600 Ω	0 ... 600 Ω	0 ... 60000	10 mΩ
	5000 Ω	0 ... 5000 Ω	0 ... 50000	100 mΩ

* mV-range: Output value • 2,5 = voltage in µV

Measurement unit

The measurement unit for temperature sensors can be configured per module:

°C Temperature output in 1/10 °C

°F Temperature output in 1/10 °F

K Temperature output in 1/10 K

For voltage and Ohm input ranges, this configuration takes no effect.


Connection & compensation techniques

	Connection & compensation technique
RTD Ohm	2 – Wire connection
	3 – Wire connection
	4 – Wire connection
TC	Internal reference junction (CJC int.)
	External reference junction (CJC ext.)**
mV	Voltage measurement using sense inputs

** In this operating mode, input 0 is used to measure the temperature of the external reference junction


Configuration and connection examples

General example for RTD and thermocouple connection

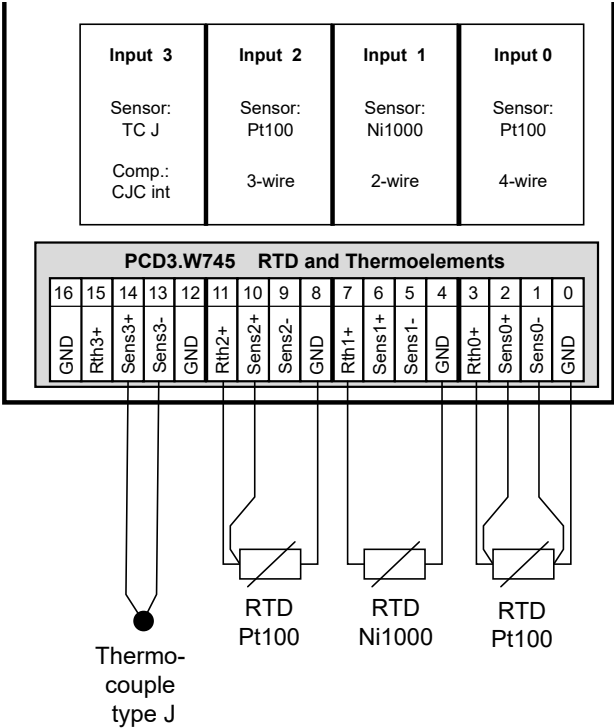

Designation	Description
RthX+	Constant current output for RTD measurement
SensX+	Positive line of the differential voltage input (Sense +)
SensX-	Negative line of the differential voltage input (Sense -)
GND	Sensor ground, galvanic separated from CPU ground



Use of an external isothermal block (CJCext)

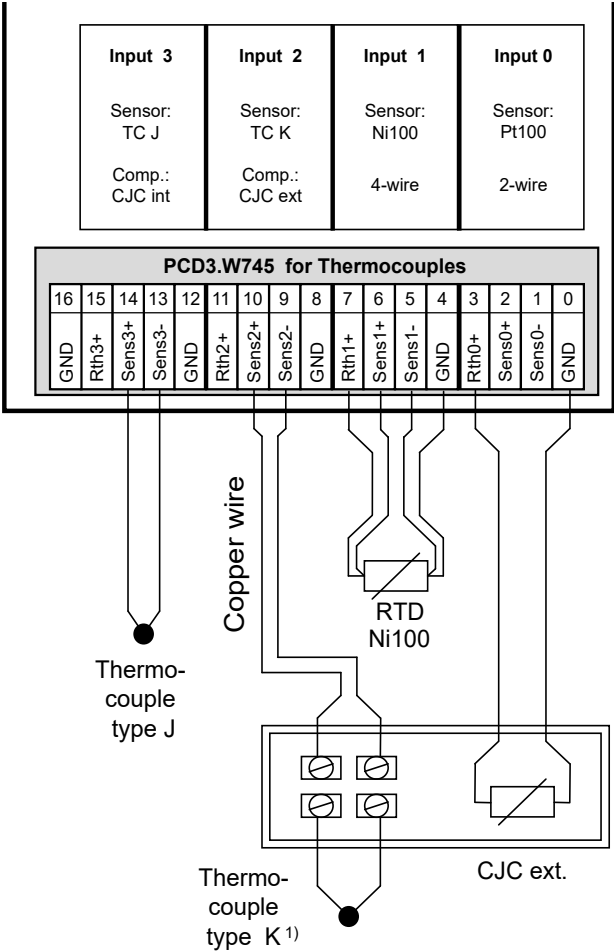




¹⁾ Input 2: Thermocouple type K combined with external cold junction CJC ext. (RTD Pt 100, 2 - wire) at input 0 for cold junction compensation.

Configuration

Saia PG5® Controls Suite

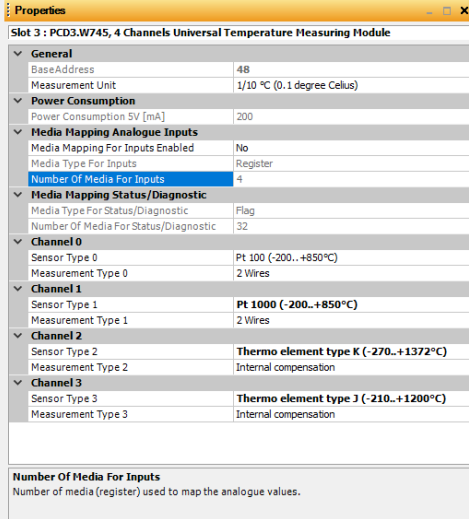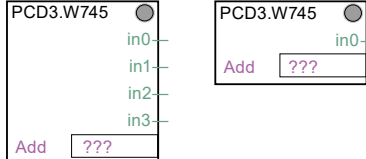PCD-System	Evaluation
Classic	<p>The evaluation is performed by the firmware. It reads the values according to the configuration (Device Configurator or Network Configurator).</p>  <p>Number Of Media For Inputs Number of media (register) used to map the analogue values.</p>
Alternatively	<p>An FBox "PCD3.W745" exists for outputs. FBox for PCD3.W745 (Inputs 0...3 selectable)</p> 

Saia Qronox ECS Engineering and Commissioning Suite

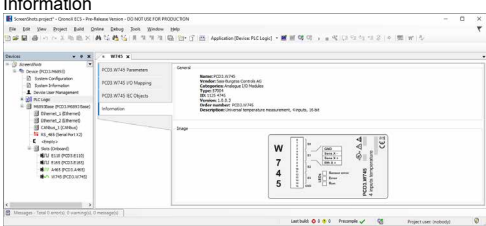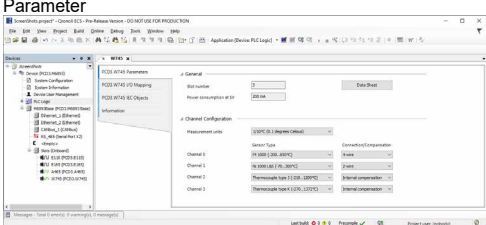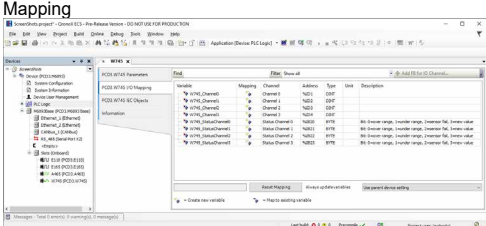PCD-System	Evaluation																																				
IEC-Controller	<p>The evaluation is performed by the firmware. It reads the values according to the configuration (Device Configurator)</p> <p>Information</p>  <p>Parameter</p>  <p>Mapping</p>  <table border="1"> <thead> <tr> <th>Channel</th> <th>Address</th> <th>Type</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>in0_Channel0</td> <td>1620</td> <td>TEMP</td> <td></td> </tr> <tr> <td>in1_Channel1</td> <td>1621</td> <td>TEMP</td> <td></td> </tr> <tr> <td>in2_Channel2</td> <td>1622</td> <td>TEMP</td> <td></td> </tr> <tr> <td>in3_Channel3</td> <td>1623</td> <td>TEMP</td> <td></td> </tr> <tr> <td>in0_Channel0</td> <td>1624</td> <td>TEMP</td> <td>0: 0...1000, 1000...1600, 1600...2000, 2000...2400</td> </tr> <tr> <td>in1_Channel1</td> <td>1625</td> <td>TEMP</td> <td>0: 0...1000, 1000...1600, 1600...2000, 2000...2400</td> </tr> <tr> <td>in2_Channel2</td> <td>1626</td> <td>TEMP</td> <td>0: 0...1000, 1000...1600, 1600...2000, 2000...2400</td> </tr> <tr> <td>in3_Channel3</td> <td>1627</td> <td>TEMP</td> <td>0: 0...1000, 1000...1600, 1600...2000, 2000...2400</td> </tr> </tbody> </table>	Channel	Address	Type	Description	in0_Channel0	1620	TEMP		in1_Channel1	1621	TEMP		in2_Channel2	1622	TEMP		in3_Channel3	1623	TEMP		in0_Channel0	1624	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400	in1_Channel1	1625	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400	in2_Channel2	1626	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400	in3_Channel3	1627	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400
Channel	Address	Type	Description																																		
in0_Channel0	1620	TEMP																																			
in1_Channel1	1621	TEMP																																			
in2_Channel2	1622	TEMP																																			
in3_Channel3	1623	TEMP																																			
in0_Channel0	1624	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400																																		
in1_Channel1	1625	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400																																		
in2_Channel2	1626	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400																																		
in3_Channel3	1627	TEMP	0: 0...1000, 1000...1600, 1600...2000, 2000...2400																																		

**ATTENTION**

These devices must only be installed by a professional electrician, otherwise there is the risk of fire or the risk of an electric shock.

**WARNING**

Product is not intended to be used in safety critical applications, using it in safety critical applications is unsafe.

**WARNING - SAFETY**

The unit is not suitable for the explosion-proof areas and the areas of use excluded in EN 61010 Part 1.

**WARNING - SAFETY**

Check compliance with nominal voltage before commissioning the device (see type label). Check that connection cables are free from damage and that, when wiring up the device, they are not connected to voltage. Do not use a damaged device !

**NOTE**

In order to avoid moisture in the device due to condensate build-up, acclimatise the device at room temperature for about half an hour before connecting.

**CLEANING**

The device can be cleaned in dead state with a dry cloth or cloth soaked in soap solution. Do not use caustic or solvent-containing substances for cleaning.

**MAINTENANCE**

These devices are maintenance-free.
If damaged during, no repairs should be undertaken by the user.

**GUARANTEE**

Opening the module invalidates the guarantee.



Observe this instructions (data sheet) and keep them in a safe place.
Pass on the instructions (data sheet) to any future user.

**WEEE Directive 2012/19/EC Waste Electrical and Electronic Equipment directive**

The product should not be disposed of with other household waste. Check for the nearest authorized collection centers or authorized recyclers. The correct disposal of end-of-life equipment will help prevent potential negative consequences for the environment and human health.



EAC Mark of Conformity for Machinery Exports to Russia, Kazakhstan or Belarus.



PCD3.W745

Ordering information

Type	Short description	Description	Weight
PCD3.W745	Temperature measurement module, 4 inputs	Universal temperature measurement module for up to 4 measuring inputs, resolution 16 bits, TC Type J & K and 4 wires Pt/Ni 100/1000 (with soldered I/O spring terminal block)	100 g

Saia-Burgess Controls AG
 Bahnhofstrasse 18 | 3280 Murten, Switzerland
 T +41 26 580 30 00 | F +41 26 580 34 99
 www.saia-pcd.com
 support@saia-pcd.com | www.sbc-support.com

Honeywell | Partner Channel