

# PCD2.K231


Plug-in system cable for terminal adapters PCD2.K520/..K521/..K525.

Sheathed, half-round cable with 34 strands, each 0.09 mm<sup>2</sup>, 1.0 m long, with 34-pin ribbon connector type D at both ends


Pre-assembled system cables and terminal adapter modules support the fast integration of the integration of the Saia PCD® I/O modules into the switch cabinet. I/O modules with ribbon connections, in particular, can be installed quickly and easily in the switch cabinet. The modules with terminals can also be connected to the adapters using traditional stranded wires. The adapters either are available for galvanic separation of the outputs with relays or as simple I/O adapters with voltage distribution.



## Dimensions

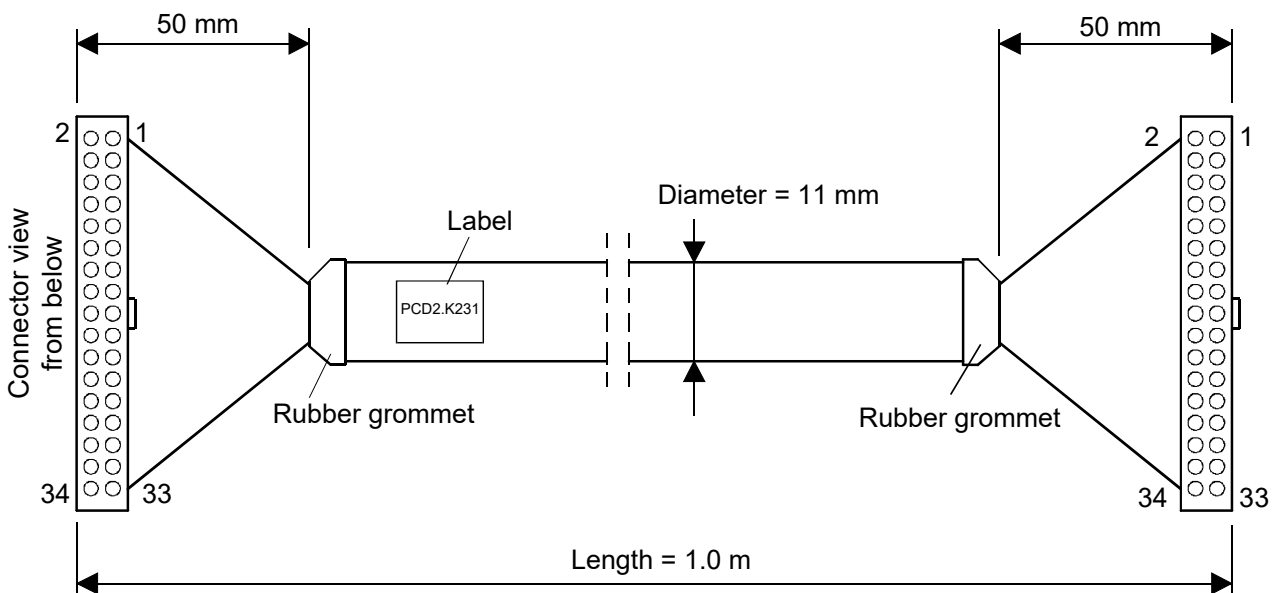


## Terminal adapter for digital inputs/outputs

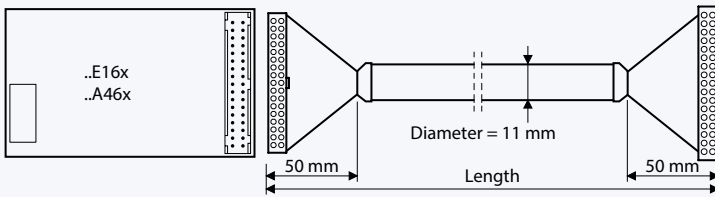

### PCD2.K231/K232 cable

Sheathed, round ribbon cable with 34 strands of 0.09 mm<sup>2</sup>,  
34-pin ribbon connector at both ends  
Cable length PCD2.K231 = 1.0 m  
PCD2.K232 = 2.0 m

## Examples with PCD2.A460, PCD2.K231 and PCD2.K52x:

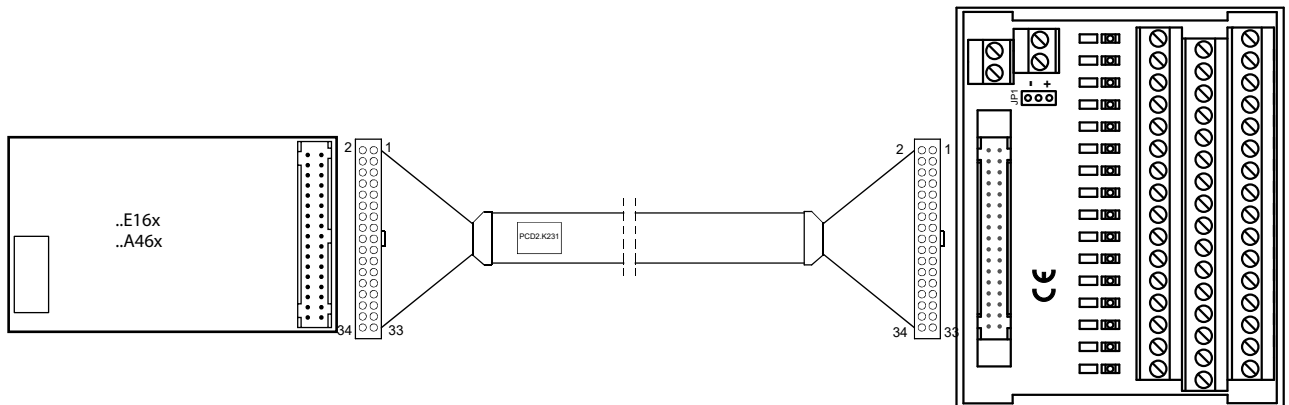

I/O modules and I/O terminal blocks may only be plugged in and removed when the Saia PCD® and the external +24 V are disconnected from the power supply.

## Ordering information

Type	Short description	Description	Weight
PCD2.K231	Plug-in system cables for PCD2 I/O modules	Plug-in system cable for terminal adapters PCD2.K520/..K521/..K525. Sheathed, half-round cable, length 1.0 m (type D); PCD side: 34-pole ribbon cable connector Process side: 34-pole ribbon cable connector	140 g

### Saia-Burgess Controls AG

Bahnhofstrasse 18 | 3280 Murten, Switzerland  
T +41 26 580 30 00 | F +41 26 580 34 99  
www.saia-pcd.com

support@saia-pcd.com | www.sbc-support.com