



Only suitably qualified personnel should install this equipment
DLS4IM DALI Interface Module




Installation Instructions

Honeywell

Honeywell

www.Honeywell.com

© 2020HoneywellInternationalInc.

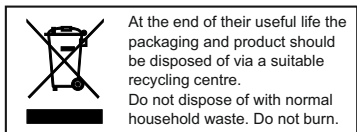

CE

Description

The DALI IM is a compact DALI device with 4 general purpose inputs. Multiple DALI IM modules can be connected to the same DALI bus, although a maximum of 2 modules is supported by a DALI in a room or DALI16 system. The module can be installed in a conduit box, backbox or pattress behind a momentary switch. The minimum required depth for a pattress box is 35 mm, however, 40 mm boxes are recommended for ease of wiring.

Specification

Supply	via DALI bus
Current consumption	4.1 mA typical
Ambient temperature	0°C – 50°C
Protection	IP20
Wire size	0.5 – 1.5 mm ²
Wire length to switches	50 cm (max.)
Output	DALI
Input	4 x push-to-make momentary switch
Input current	<4 mA
Dimensions (H x W x D)	40 x 28 x 15 mm

Wiring Example

